

# ATEM 4 M/E Advanced Panel 40



This massive model is big enough to perfectly match the features on the ATEM Constellation switcher! It features 4 M/E rows with 40 input buttons per row and 4 independent system control LCDs for each row. This massive panel includes 24 LCD's for custom labeling of every button on every row!


## Connections

### Ethernet

4 x 10/100/1000 BaseT with loop additional control panels or computers.

### Software Updates

1 x USB-C for firmware updates. output for

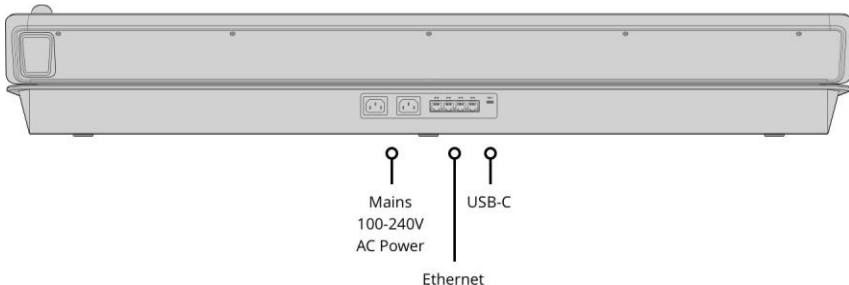

## Product Specifics

**Number of Mix Effects Rows** 4

**Direct Cross Points** 40

**Shifted Cross Points** 80

**Crosspoint Button Type**

Tri-Color LED

**Crosspoint Label**

10 rows 24 character LCD

**Next Transition Selectors** 4 x

BKG, Key 1 - Key 4.

**On-Air indicator** 20

**Power Status Indicators**

None

**DSK Transition Selectors**

Auto, Cut, Tie/Preview x 4

**Preview Transition** 4

**Transition Rate Displays** Via main menu

**LCD Menu Displays**

4

**Menu Control** 20  
buttons x 4

**Dedicated Macro Buttons** 4 x  
40

**Transport Control Buttons**  
24

**Destination Bus** 4

**Source Select Bus**  
4

**Fader Bar**  
4

**3 Axis Joystick** 1

**Numeric Keypad**  
1

---

## Software

**Software Applications**  
ATEM Software Control Panel.

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 10, 64-bit.

---

## Power Requirements

**Input Voltage**  
2 x Internal 100 - 240V AC.

**Redundant Power** Yes

**Power Usage** 250W

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 60° C (-4° to 140° F)

### Relative Humidity

Up to 95%

---

## What's Included

A TEM 4 M/E Advanced Panel 40

---

## Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller
---------------------------------------