

# DeckLink Mini Recorder 4K



DeckLink Mini Recorder 4K is a low profile PCI Express capture card, featuring 6G-SDI and the latest HDMI 2.0a connections so you can record all formats up to 2160p30 on your computer! The SDI and HDMI inputs automatically detect and switch between all video formats. You even get high dynamic range recording and metadata over HDMI. The DeckLink Mini Recorder 4K is perfect for integrating into mobile live capture environments, broadcast trucks and more! You can even develop your own custom capture solutions using the Blackmagic Desktop Video SDK for Mac OS, Windows and Linux! Includes two PCI Express shields for both full height and low profile slots.

## Connections

### SDI Video Inputs

1 x 10-bit SD/HD/Ultra HD switchable.

### SDI Audio Inputs

16 channels embedded in SD, HD, Ultra HD.

### HDMI Video Inputs


1 x HDMI 2.0a connector.

### HDMI Audio Inputs

8 Channels embedded in SD, HD, Ultra HD.

### Computer Interface

PCI Express 4 lane generation 2, compatible with 4, 8 and 16 lane PCI Express slots.

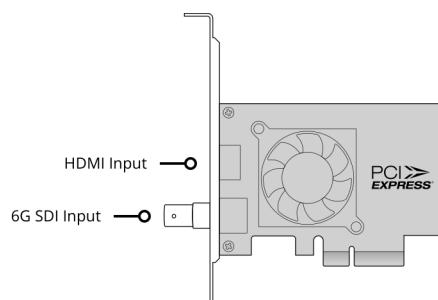

---

## Supported Codecs

AVC-Intra, AVCHD, Canon XF MPEG2,  
Digital SLR, DV-NTSC, DV-PAL,  
DVCPRO50, DVCPROHD, DPX, HDV,  
XDCAM EX, XDCAM HD, XDCAM  
HD422, DNxHR & DNxHD, Apple  
ProRes 4444, Apple ProRes 422 HQ,  
Apple ProRes 422, Apple ProRes LT,  
Apple ProRes 422 Proxy,  
Uncompressed 8-bit 4:2:2,  
Uncompressed 10-bit 4:2:2.

---

## Software

### Software Included

Media Express, Disk Speed Test,  
LiveKey, Blackmagic Desktop Video  
Utility and Blackmagic driver on Mac  
OS and Windows. Media Express,  
Blackmagic Desktop Video Utility and  
Blackmagic driver on Linux.

### Internal Software Upgrade

Firmware built into software driver.  
Loaded at system start or via updater  
software.

### Physical Installation

PCI Express 4 lane generation 2,  
compatible with 4, 8 and 16 lane PCI  
Express slots on Mac OS, Windows  
and Linux. Mac OS systems require a  
Mac Pro computer with PCI Express  
slots. Please check the Support pages  
to see the full system requirements.

---

## Software Applications



DaVinci Resolve



Adobe Premiere Pro CC



Avid Media Composer



Adobe Photoshop CC

**Other supported applications include:** Tools On Air Just: Play & Live & In, Softron MovieRecorder & MReplay, Adobe Flash Media Live Encoder, Telestream Wirecast, Livestream Producer, Resolume Arena, Magix Vegas Pro & Movie Edit Pro Premium, Corel VideoStudio Pro, CyberLink PowerDirector, Vidblaster X & Studio & Broadcast, Uniplay One & CG, CasparCG Server, Magicsoft CG, Xsplit Broadcaster, Imagine Communications Velocity & InfoCaster, DevTek Easy Media Suite, Metus Ingest, Boinx Software MimoLive, Cinegy Capture Pro, vMix Live, Renewed Vision ProPresenter, Ventuz Director, Class X Liveboard & Coral CG, Glookast Capturer, Open Broadcaster Software Studio, Nautilus NEMO3D, Burst Video WebClip2Go & [REC]Marker, Zoom.

---

## Video Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

<b>HD Video Standards</b>	<b>SDI Compliance</b>	<b>Color Space</b>
720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60	SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 372M, SMPTE 425M, SMPTE 2081, ITU-R BT.656 and ITU-R BT.601.	REC 601, REC 709, REC 2020.
<b>2K Video Standards (SDI ONLY)</b>	<b>SDI Metadata Support</b>	<b>HDMI Video Sampling</b>
2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI F25PsF	RP 188/SMPTE 12M-2 and closed captioning.	4:4:4, 4:2:2 & 4:2:0
<b>Ultra HD Video Standards</b>	<b>Audio Sampling</b>	<b>HDMI Configuration</b>
2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30	Television standard sample rate of 48 kHz and 24 bit.	HDMI 2.0a supports Deep Color and HDR.
<b>4K DCI Video Standards</b>	<b>SDI Video Sampling</b>	<b>HDMI Color Precision</b>
4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p.	4:4:4 & 4:2:2	Up to 12-bit (Deep Color)
	<b>SDI Color Precision</b>	<b>Multiple Rate Support</b>
	8, 10, 12-bit RGB 4:4:4 in all modes up to 1080p60, and 8, 10-bit YUV 4:2:2 in all modes.	HDMI and SDI video connections are switchable between SD/HD/2K and 4K.
		<b>Copy Protection</b>
		HDMI input is unable to capture from copy protected HDMI sources. Always confirm copyright ownership before capture or distribution of content.

## Processing

### Colorspace Conversion

Hardware based real time.

### HD to SD Down Conversion

Software based down conversion  
during video capture.

### HD Up Conversion

Software based up conversion from  
SD to HD on capture. Selectable  
between 4:3 pillarbox or 16:9  
anamorphic.

## Physical Specifications



---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10, both 64-bit.



Linux

---

## Power Requirements

### Power Consumption

8 Watts

---

## Environmental Specifications

### Operating temperature

5° to 40° C (32° to 104° F)

### Storage temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

DeckLink Mini Recorder 4K  
Low profile slot bracket

---

## Warranty

3 Year Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller