



DATASHEET

Easy Splice Pigtailset LC

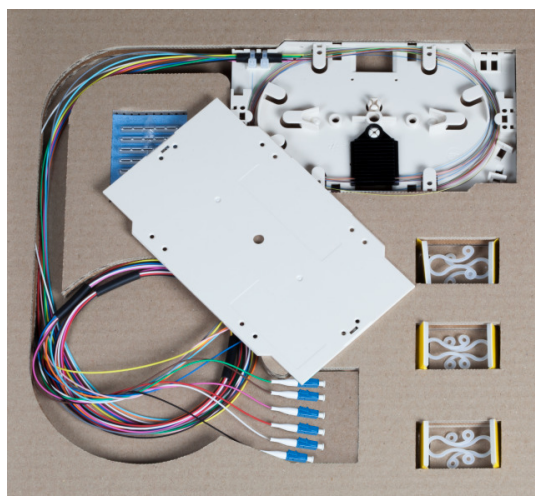

Description

The pigtail set is ready for splice and direct use. The 12 LC fiber pigtails are coloured according to DIN VDE 0888 and bundled with shrink tube grommet around the fibers. The cable drillers in the set are bound for a decent laying and fiber guidance. The use of the special manufactured packaging warrants a safe transportation.

Scope of delivery

- 12x LC pigtails
- 1x splice cassette
- 1x cover
- 1x splice holder
- 12x splice protection
- 6x cable driller for fiber guidance

General data

Type	Cable pigtail
Core type	semi-tight tubes
Colour Code	VDE-0888
Anti-kink sleeve	put-on

Mechanical characteristics

Max. Tension	3 N
Mion. Bending Radius Static	10xOD
Minimaler Biegeradius Dynamic	20xOD

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.



DATASHEET

Easy Splice Pigtailset LC

Cable construction

Outer Diameter | 0.9 mm

Cable sheath

Jacket Material | LSZH

Dimensions

Length | 2.0 m

Environmental conditions

Operating Temperature | -20 – 70 °C

Standards, approvals, certifications

Connector Conform to Standard | IEC61754-20

Cable Conform to Standard | IEC60793-2

Available variants

Article no.	Title	Fibre type	Category	Bend optimized fiber	Colour	APC-version	Connector Colour	Type of connector	Insertion loss 850nm	Insertion loss 1310nm	Quality class singlemode	Quality class Multimode
O0482SET	Easy Splice Pigtailset LC OS2/APC	Singlemode	OS2	no	12-colours	True	green	LC/APC		< 0.3 dB	B/2 acc. IEC 61753-1	
O0481SET	Easy Splice Pigtailset LC OS2	Singlemode	OS2	no	12-colours	False	blue	LC		< 0.3 dB	B/2 nach IEC 61753-1	
O3483OM5SET	Easy Splice Pigtailset LC OM5	Multimode 50/125	OM5	OM5 acc. to IEC60793-2-10 type A1a.4	12-colours	No	beige	LC	< 0.3 dB			A/1 according to IEC-6175-222-2
O3483SET	Easy Splice Pigtailset LC OM4	Multimode 50/125	OM4	OM4 acc. to IEC60793-2-10 type A1a.2 and A1a.3	12-colours	False	beige	LC	< 0.3 dB			A/1 according to IEC-6175-222-2
O3482SET	Easy Splice Pigtailset LC OM3	Multimode 50/125	OM3	OM3 acc. to IEC60793-2-10 type A1a.2 and A1a.3	12-colours	False	beige	LC	< 0.3 dB			A/1 according to IEC-6175-222-2
Article no.	Title	Fibre type	Category	Bend optimized fiber	Colour	APC-version	Connector Colour	Type of connector	Insertion loss 850nm	Insertion loss 1310nm	Quality class singlemode	Quality class Multimode
O3484SET	Easy Splice Pigtailset LC OM2	Multimode 50/125	OM2	OM2 acc. to IEC60793-2-10 type A1a.1	12-colours	False	beige	LC	< 0.3 dB			A/1 according to IEC-6175-222-2


This datasheet was created automatically on 18-11-2020 . Technical changes reserved.



DATASHEET

Easy Splice Pigtailset LC

Technical drawings

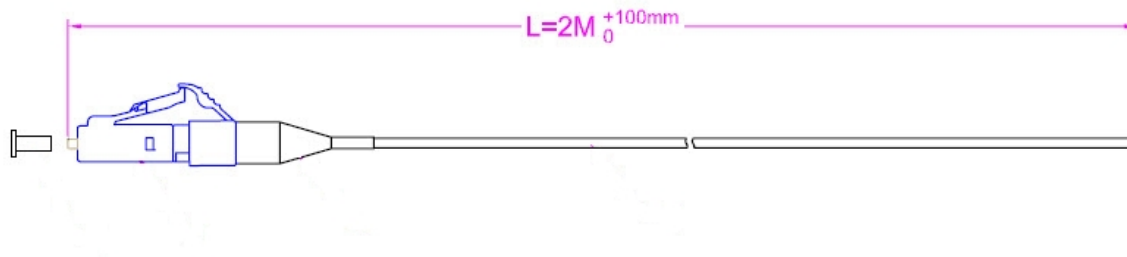

spare part

81044.100	Cable Ties
53100.21	Splice Holder for Crimp Arc Splices
53100.201	Cover for Splice cassette 53100.200
53100.200	Splice Cassette for 2 x Splice Holder

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.

