


DATASHEET

Splicebox sliding unit, with shifted LC-Duplex metal adapter and stripped pigtails, OM3

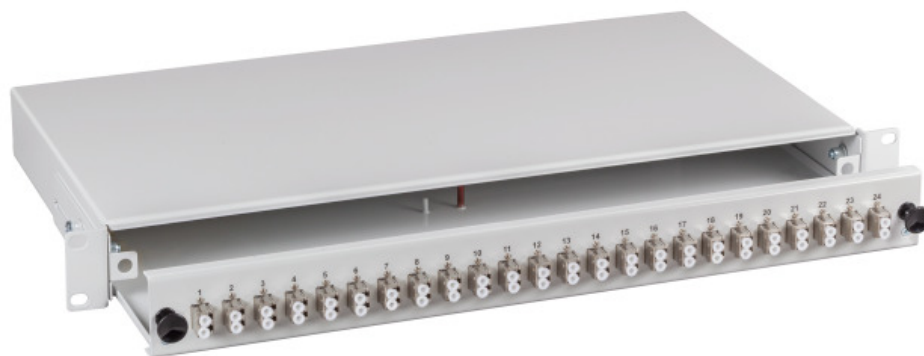

Description

completely assembled splice box with adapters and coloured pigtails
 metal housing depth adjustable
 cable entries at the rear, incl. 1 x PG16
 6 x self adhesive fiber tray

Special assembly possible at short notice!

General data

Mounting method	482.6 mm (19 inch)-installation
With housing	True
With front plate	True
With pigtails	True
Number of height units	1
Type of connector external	LC-Duplex
Type of connector interior	LC-Duplex
Pigtails prepared	stripped
Sliding	sliding version
Fibre type	Multimode 50/125
Fibre class	OM3
Adapter material	Metall adapter

Dimensions

Height	44.5 mm
Width	483.0 mm
Depth	244.0 mm

Available variants

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.



DATASHEET

Splicebox sliding unit, with shifted LC-Duplex metal adapter and stripped pigtails, OM3

Article no.	Title	Pigtail	With number of couplings/adapters	Adapter colour	Suitable for number of couplings/adapters	Colour	RAL-number
BA71902V.48OM3	Splice box LC 50/125µ a.,48Pigt. stripped / 24 Adapter	48 x LC	24	metal	24	grey	7035

accessory

53012.1	Cable Glands, Standard
80362.2-10	FO Marking Strips "Warnung vor Laserstrahlung"
39926.1	Miller® Fiber Cleaning Tapes
53010.5	Cable gland PG-16

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.

