
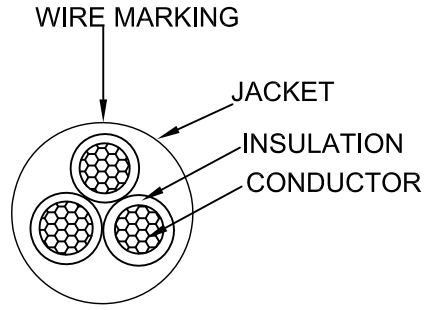


CUSTOMER NAME
CUSTOMER Part No.

DATE	REV	DESCRIPTION	BY
2014.03.07	A/0	NEW	Vinci
2015.08.04	A/1	ADD ITEM AK5188 · AK5189 · AK5024	Maxwell Yuan
2016.07.26	A/2	CHANGE THE REMARKS	Susam Tang

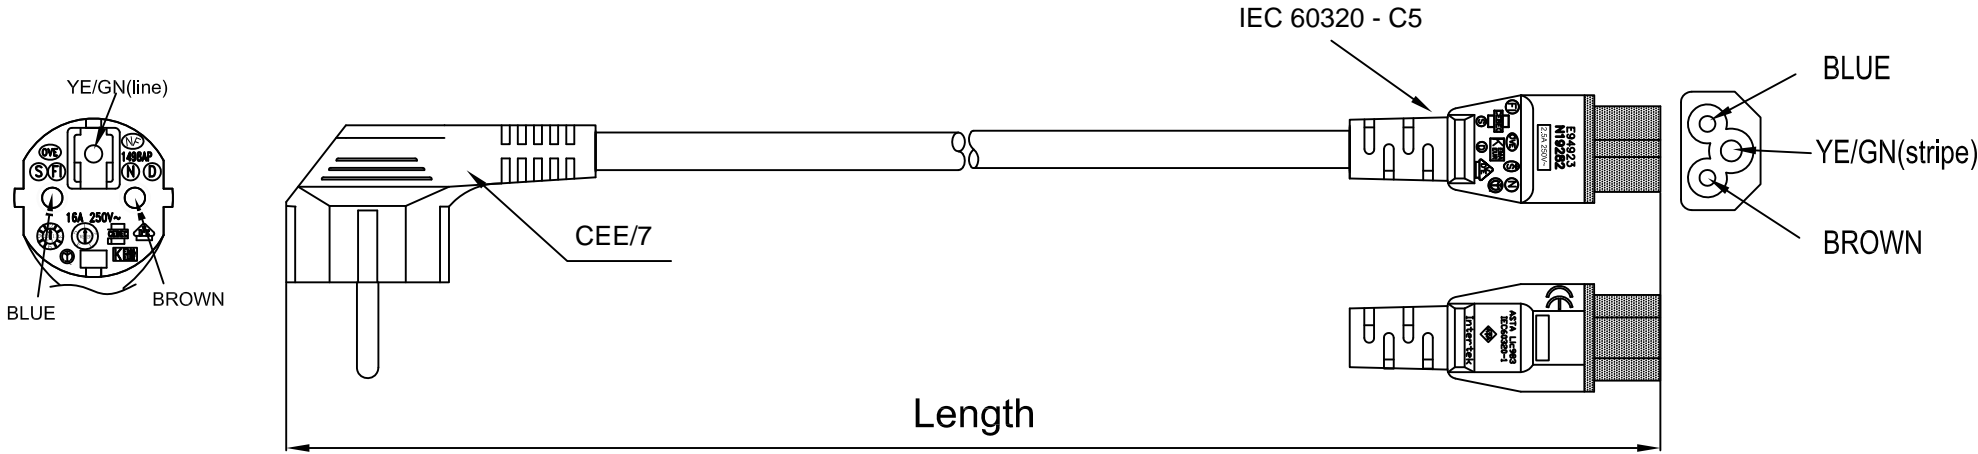

Part No.	Length
AK5144	2000±20mm
AK5162	1000±10mm
AK5163	5000±50mm
AK5188	7000±90mm
AK5189	10000±100mm
AK5024	3000±45mm

- REMARKS:
- 1.PLUG CEE/7 RATED POWER:250V 16A
 - 2.CONNECTOR IEC 60320 - C5 RATED POWER:250V 2.5A
 - 3.WIRE: H05VV-F 3G0.75MM² RATED VOLTAGE:300/500V
 - 4.COLOR:BK
 - 5.DVW TEST:2000VAC,1S
 - 6.POLARIZATION AND CONTINUITY TEST
 - 7.CABLES CONFORM TO RoHS

WIRE MARKING: (Hollow) NO.129		+ 0 0 0 0 KEMA-KEUR CEBC 972 NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM ² V-75 300/500V ORDINARY DUTY NSW17436							
Key Size		3RD							
Length (mm)	Tolerance			Part No.	Description SF-04+SF-87 H05VV-F 3G0.75MM ² BK				
	Critical	Normal	General						
0-15	±0.05	±0.10	±1.0	UNIT	mm	APPROVAL	CHECKER	DRAWER	
15-60	±0.10	±0.20		PAGE	1/1				
60-150	±0.15	±0.35	±1.5	Draw.No.					
150-350	±0.20	±0.50							
350-1000	±0.40	±0.65	±2.0						