



RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
	A/0			

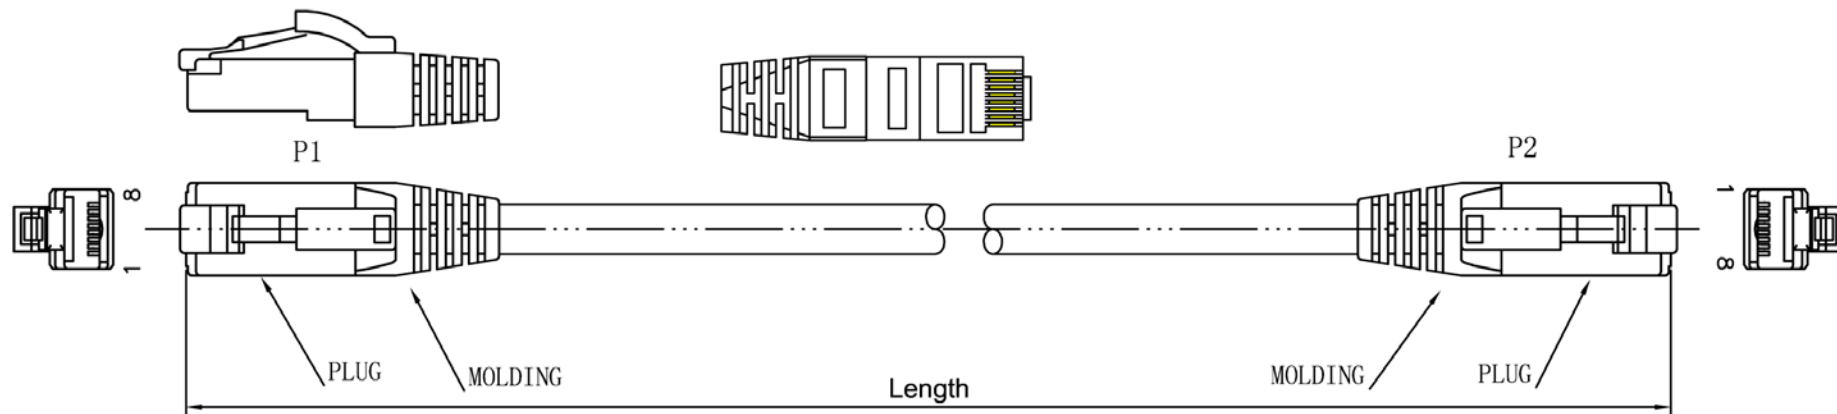

MARKING: **ACT CATEGORY 6A UTP PATCH CABLE CONFORM TO ANSI/TIA-568-C.2 ▲ 24AWGX4P**
 (FP0407) **CMX(UL) c(UL) CMH E164469-XX 15000.001**

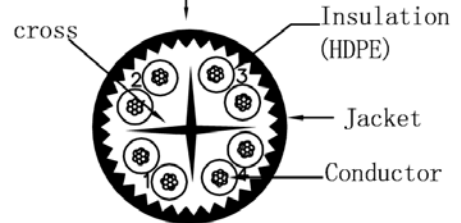

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2
1	1	WHT/ORG	3
	2	ORG	6
2	3	WHT/GRN	1
	6	GRN	2
3	4	BLU	7
	5	WHT/BLU	8
4	7	WHT/BRN	4
	8	BRN	5

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.2mm MAX AVG:0.3mm Diameter:1.03±0.06mm
Jacketing	PVC Thickness:MIN at any point:0.65mm MAX AVG:0.75mm Diameter:7.0±0.15mm

Wire	CAT. 6A UTP STR 24AWG*4P
Plug	YUS-28(CAT. 6A UTP) 8P8C 50U"
Length=xx	xxM
Boot Color	RD210(RAL3020)
Wire Color	BK012(RAL 9011)

Unless specified on the drawing, tolerances are per the follows:

.X ± 1
.XX ± 0.2
.XX ± 0.05

3RD

AE				
DRAW. NO	L-227	ITEM	IB62XX	
CUSTOMER NAME		DRAW	DHY	DATE 2011/11/07
SCALE		CHECKER	wuxiao	DATE 2011/11/07
UNIT	MM	SHEET	1	OF 1