


REV.	REVISION	DATE

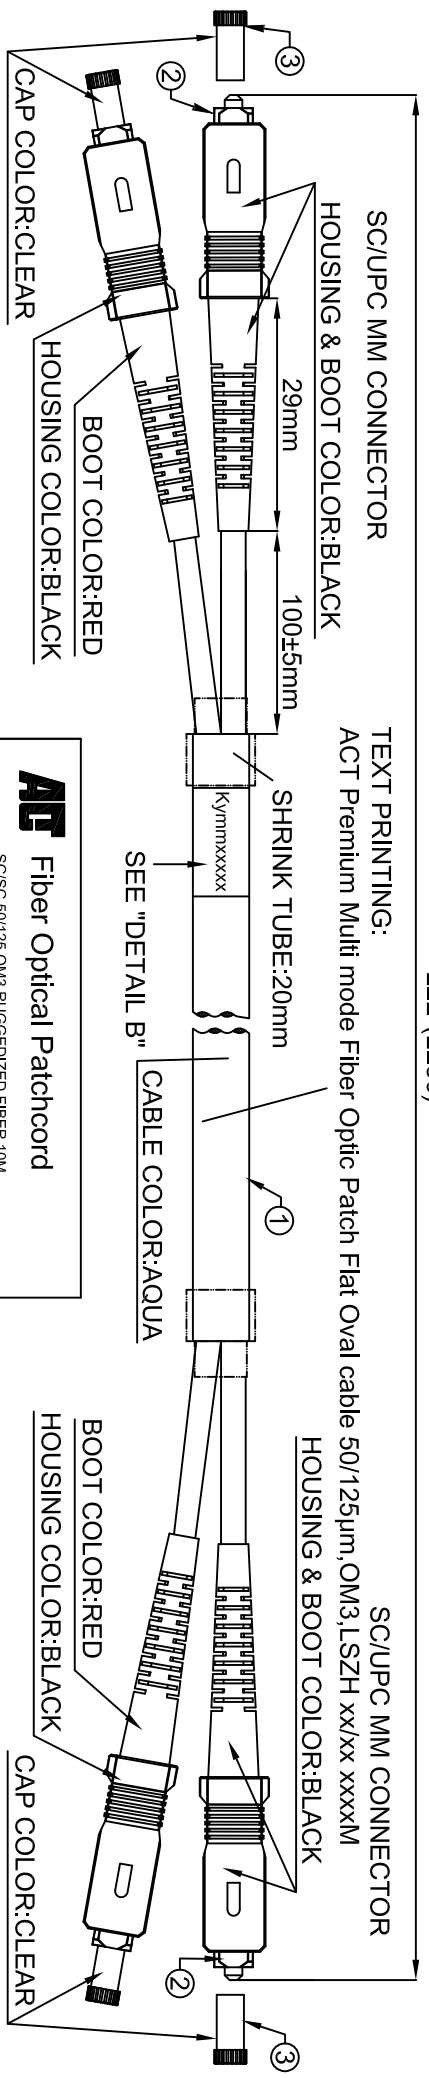

SC/UPC MM CONNECTOR
HOUSING & BOOT COLOR:BLACK

TEXT PRINTING:
ACT Premium Multi mode Fiber Optic Patch Flat Oval cable 50/125µm, OM3, LSZH xx/xx xxxxxM

SC/UPC MM CONNECTOR
HOUSING & BOOT COLOR:BLACK

PACKING:

ROUND CABLE METHOD SEE "DETAIL A"	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON


ATG Fiber Optical Patchcord
SC/SC 50/125 OM3 RUGGEDIZED FIBER 10M

Model: xxxxx - xxxxxx
Lot number: X X X X X X X X X X X X X X X X


Performance (@23°C) A=850/1300±20nm

Serial No	Insertion Loss
A	850nm
B	1300nm
C	
D	

- ACT advices to clean connector ferrule before usage to get optimal performance
- Always leave the dust caps on if the cable isn't installed
Prepared By: _____ Date: _____

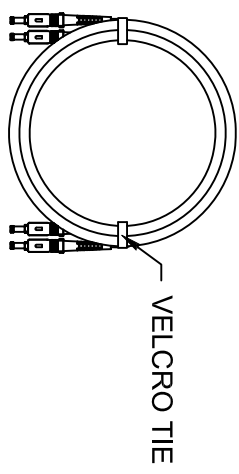


DETAIL C



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

PROFILE VIEW

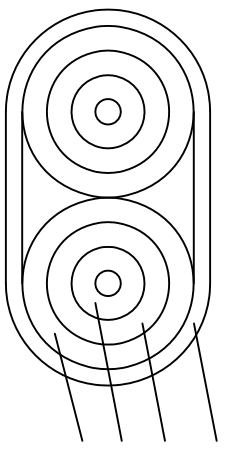

3	4PCS	SC DUST COVER,CLEAR.
2	4SETS	CONNECTOR:SC/UPC MM,BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC	CABLE:MULTIMODE,50/125µm,OM3, RUGGEDIZED FIBER,LSZH AQUA JACKET.
ITEM	QTY	PART NO. DESCRIPTION
PART LIST		

RL5305	05	164.0'(50000)	SC/SC 50/125 OM3 RUGGEDIZED FIBER 50M
RL5304	04	131.2'(40000)	SC/SC 50/125 OM3 RUGGEDIZED FIBER 40M
RL5303	03	98.4'(30000)	SC/SC 50/125 OM3 RUGGEDIZED FIBER 30M
RL5302	02	65.6'(20000)	SC/SC 50/125 OM3 RUGGEDIZED FIBER 20M
RL5301	01	32.8'(10000)	SC/SC 50/125 OM3 RUGGEDIZED FIBER 10M
PART NO.	** XX	L	DESCRIPTION
CUSTOMER APPROVAL:			DATE:

	UNIT: Inches[mm]	TITLE: PATCHCORD SC-SC MULTIMODE DUPLEX RUGGEDIZED FIBER 50/125 OM3 LSZH AQUA.
DRAWN BY: Vernon	DATE: 2016.06.13	CUSTOMER: CUSTOMER PART NO. RL53**
CHECKED BY: Wale	DATE: 2016.06.13	REV. C
APPROVED BY: David	DATE: 2016.06.13	TRENDX PART NO.
SALE BY:	DATE:	

Product Specification

STANDARD COMPLIANCES

ANSI/TIA-568-C.3

ISO 11801 OM3 /IEC60793-2-10 type A1a

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2011/65/EU

CONSTRUCTION & CHARACTERISTICS

Polish	Insertion loss typical	0.1 dB
	Insertion Loss max.	0.2 dB
	Return Loss min.	≥45dB
	Polish	UPC
Connector	Connector A side spec.	IEC61754-4 SC Connector
	Connector B side spec.	IEC61754-4 SC Connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OM3
	Fiber type	Multimode 50/125
	Cable type	I-V(ZN)H 4.8x2.8mm LSZH aqua
	Tensile strength	100N (Short time 200N)
	Operation temp.	-20°C to +60°C
	Vibration	10 to 55 Hz 1.5mm Double Amplitude
Fire performance	Flame retardancy	IEC 60332-1-2 and IEC 60332-3-22 Cat.A
	Smoke density LS	IEC 61034
	Absence of halogen ZH	IEC 60754-1
	Riser cable	LSZH/OFNR
Marking		ACT Premium Multimode Fiber Optic Patch Flat Oval cable 50/125 μ m,OM3,LSZH xx/xx xxxxM

100% tested and approved

- ACT advises to clean every connector ferrule before usage to get optimal performance
- Always leave the dust caps on if the cable isn't installed