


REV.	REVISION	DATE

L±2" (L±50)

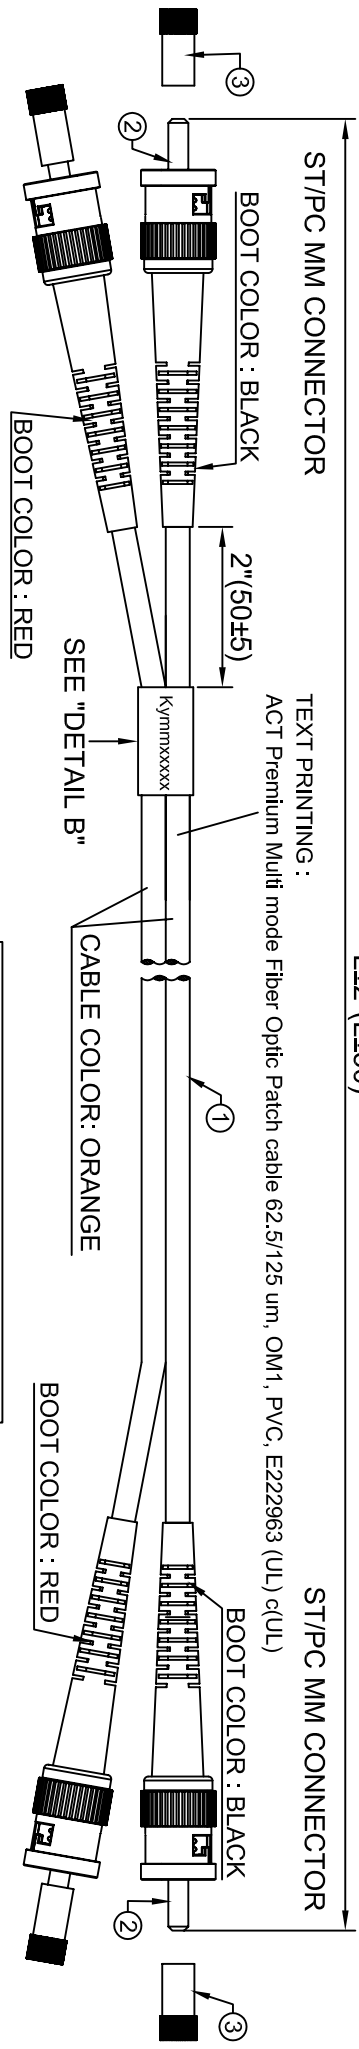

ST/PC MM CONNECTOR
 TEXT PRINTING :
 ACT Premium Multi mode Fiber Optic Patch cable 62.5/125 um, OM1, PVC, E222963 (UL) c(UL)
 ST/PC MM CONNECTOR

ATF Fiber Optical Patchcord

- NOTE:
- 1. INSERTION LOSS < 0.3dB.
 - 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 - 3. DURABILITY: 500 CYCLES.
 - 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 - 5. TENSILE STRENGTH: 10Kg.
 - 6. PACKING:

SEE TABLE "DESCRIPTION 1"

P.O.NO.

SEE TABLE "DESCRIPTION 2"

Performance: (@23°C) λ=850/1310±20nm
 Insertion Loss ≤ 0.3dB



Serial No	A	B	C	D
Insertion Loss	850nm	1310nm		

Prepared By: _____ Date: _____

ROUND CABLE METHOD SEE "DETAIL A"

BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL

EACH LARGE POLYBAG IN AN OUTER CARTON

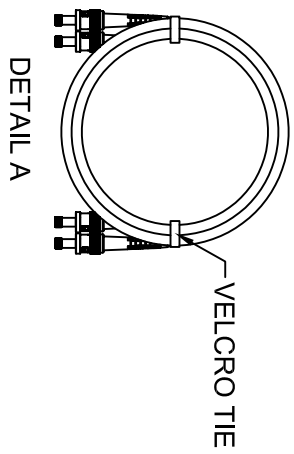

Y: Year: mm: Month
 xxxxx: Serial Number

Part No.	*	L	Description 1	Description 2
RL1005	5	16.4'(5000)	112205-RL1005	8716065170757
RL1003	3	9.84'(3000)	112203-RL1003	8716065170740
RL1002	2	6.56'(2000)	112202-RL1002	8716065170733
RL1001	1	3.28'(1000)	112201-RL1001	8716065170726

CUSTOMER APPROVAL: _____ DATE: _____



DRAWN BY Catherine	UNIT: Inches[mm]	TITLE: PATCHCORD ST-ST MULTIMODE
CHECKED BY	DATE 2007/10/3	DUPLEX 62.5/125, OM1, 3.0mm, ORANGE.
APPROVED BY	DATE	CUSTOMER PART NO.
SALE BY	DATE	DRAWING NO. PK709001
		CUSTOMER PART NO. RL100*
		REV. B
		TRENDX PART NO.

3	4PCS	ST DUST COVER, CLEAR.
2	2SETS	CONNECTOR: ST/PC MM, WITH 3.0mm BLACK & RED BOOT.
1	1PC	CABLE: MULTIMODE, 62.5/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.
ITEM	Q'TY	PART NO. DESCRIPTION
PART LIST		