


DATASHEET

Power Cable CEE7/7 90° - C13 180°, black

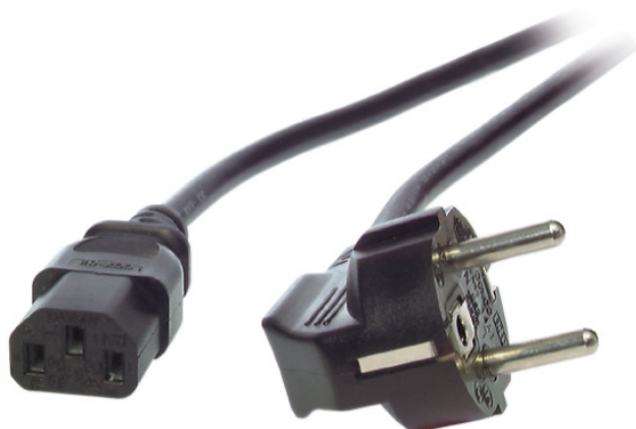

Description

10 A / 250 V VDE tested
 Colour black
 Suitable for Germany, Belgium, France and further (see overview)

General data

Connection 1	SCHUKO plug, angled
Connection 2	Cold device plug straight, female
Number of cores	3
Spiralized cable	False
Protective conductor	True
With cord switch	False
Colour outer sheath	Black

Cable sheath

Material outer sheath	PVC
Temperature resistance	0 - 70 °C

Electrical characteristics

Nominal voltage	250 V
-----------------	-------

Standards, approvals, certifications

Oil resistant (acc. EN 60811-2-1)	False
-----------------------------------	-------

Available variants

This datasheet was created automatically on 04-03-2021 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 180°, black

Article no.	Title	Nominal cross section conductor	Outer diameter approx.	Length
EK504.0,5	Power Cable CEE7/3 90° - C13 180°, black, 0.5 m, 3 x 0.75 mm ²	0.75 mm ²	6.8 mm	0.5 m
EK504.0,75	Power Cable CEE7/3 90° - C13 180°, black, 0.75 m, 3 x 0.75 mm ²	0.75 mm ²	6.8 mm	0.75 m
EK504.10	Power Cable CEE7/3 90° - C13 180°, black, 10.0 m, 3 x 1.50 mm ²	1.50 mm ²		10.0 m

Article no.	Title	Nominal cross section conductor	Outer diameter approx.	Length
EK504.1V2	Power cable CEE 7/7 90°-C13 180° black 1,0 m, 3 x 0.75 mm ²	0.75 mm ²	6.5 mm	1.0 m
EK504.2V2	Power cable CEE 7/7 90°-C13 180° black 2,0 m, 3 x 0.75 mm ²	0.75 mm ²	6.5 mm	2.0 m
EK504.3V2	Power cable CEE 7/7 90°-C13 180° black 3,0 m, 3 x 1.00 mm ²	1.00 mm ²	6.8 mm	3.0 m
EK504.5V2	Power cable CEE 7/7 90°-C13 180° black 5,0 m, 3 x 1.00 mm ²	1.00 mm ²	6.8 mm	5.0 m

This datasheet was created automatically on 04-03-2021 . Technical changes reserved.

