






MAX620H250S-HDS

 687 x 528 x H276 mm
27.05 x 20.79 x H10.86 inch.


 620 x 460 x 250 mm
24.40 x 18.11 x 9.84 inch.

 60 + 190 mm
2.36 + 7.48 inch.

 VERSION S: 8,14 kg / 17.94 lb
VERSION HDS: 10.12 kg / 22.31 lb



SIDE HANDLES
MANIGLIA LATERALE
SU ENTRAMBI I LATI

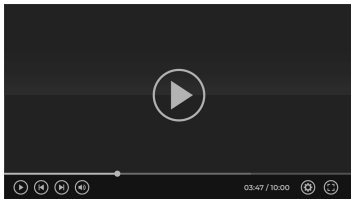

**HIGH DENSITY
CUBED FOAM
VIDEO**

- **WATERTIGHT SEAL AROUND LID / GUARNIZIONE ERMETICA**
- **AUTOMATIC PRESSURE RELEASE VALVE / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE**
- **EASY TO OPEN DOUBLE THROW LATCHES / CHIUSURE DI SICUREZZA A DOPPIO STEP**
- **LOAD TESTED SOFT GRIP HANDLE / MANICO MORBIDO AD ALTA ERGONOMICITÀ**
- **STACKABLE INTERLOCKING SYSTEM / SISTEMA DI IMPILABILITÀ**
- **THICK BODY MATERIAL / PARETI SPESSE ANTIURTO**
- **FULLY LENGTH HINGES / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA**
- **NYLON PINS, CORROSION FREE / PERNI IN NYLON ANTI CORROSIONE**
- **SCREEN PRINTING AND RESIN LABEL SPACE / SERIGRAFIA ED ETICHETTA RESINATA**
- **MATERIAL: POLYPROPYLENE COPOLYMER / MATERIALE: POLIPROPILENE COPOLIMERO**
- **LATCHES: NYLON / SERRATURE IN NYLON**
- **O-RING: POLYMER / GUARNIZIONE POLIMERO**
- **WHEELS WITH STAINLESS STEEL PIN / RUOTE CON ASSALE IN ACCIAIO INOX**


- **INTERNAL CUBIC VOLUME: 69750000 CUBIC MM - 2.463 CUBIC FEET / VOLUME: 69750000 MM CUBI**
- **VOLUME CAPACITY: 69.75 LT / CAPACITÀ: 69.75 LT**
- **PCS PER CARTON: 1 / PEZZI PER CARTONE: 1**
- **WEIGHT OF THE FULL CARTON: 9.54 KG - 21.03 LBS. / PESO DEL CARTONE: 9.54 KG**
- **MOULDING: INJECTION MOLDED / STAMPAGGIO: AD INIEZIONE**
- **RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F) / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)**
- **ACCESSORIES: CUBED & CONVOLUTED FOAMS / SPUGNE CUBETTATE & SPUGNE BUGNATE**

IP67 RATING


ATA 300

MIL SPECS


**DEF STAN 81-41
STANAG 4280**



+



+



=



Base foam

1 x 40 mm / 1 x 1.57 inch


Cubed foam

3 x 50 mm / 3 x 1.97 inch


Convuluted foam

1 x 50 mm / 1 x 1.97 inch


MAX620H250S



+



+



=



Base foam

1 x 40 mm / 1 x 1.57 inch

High Density Cubed foam

3 x 50 mm / 3 x 1.97 inch

Convuluted foam

1 x 50 mm / 1 x 1.97 inch

MAX620H250HDS