



EV2480-BK

Your advantages

The EV2480 offers the variety of advanced interfaces, including USB downstream ports, as well as USB-C upstream, DisplayPort and HDMI inputs. The 70 W power supply via the USB-C port is highly practical. It is able to reliably charge small computers or laptops and can be easily and quickly connected with just one cable. The EV2480 is energy-efficient, ergonomic and reliable, and offers impressive image quality. The virtually frameless design gives the 23.8-inch monitor with 16:9 resolution the perfect image size for everyday use in the office. Antireflection technology and Auto EcoView ensure a glare-free view of the screen. The LCD featuring IPS technology ensures the greatest possible viewing angle. The brightness sensor, speakers and controls are built into the bezel. They are fully integrated into the monitor's design to offer an excellent user experience. The EV2480 can be swivelled, rotated and tilted to the position that is most comfortable for your back, neck and posture. Thanks to variable height adjustment, you can position the top image line ergonomically right below your eye level, which makes the EV2480 a pleasure to work with.





Cutting-edge connectivity with USB-C

A single USB-C cable is all that is needed to provide video and audio reproduction, transfer data quickly and supply power to the connected devices. The 70 W power supply via USB-C is highly practical and can reliably charge small computers or laptops. This creates more space on your desk since you no longer need an additional power supply for your computer.

For information on compatibility between PCs and FlexScan monitors when using a USB-C connection, please visit the EIZO Global website.



One monitor, many ports


It doesn't get simpler than this: Most end devices, such as PCs, laptops and cameras, can be connected directly to the monitor, thanks to its wide range of signal interfaces. The screen also features four USB type A 3.1 ports. This allows different devices such as mice, keyboards and headsets to be connected. This makes your everyday work easier and guarantees a tidy desk.



Elegant design


The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.

Incidentally, the EV2480 is an ideal match for daisy-chain multiscreen systems with its sister model, the EV2490. The housing design and stand are identical.

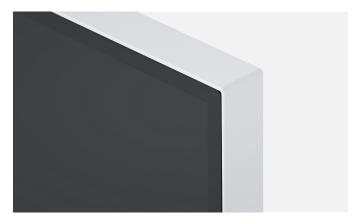

Controls integrated into bezel


Electrostatic switches are integrated into the front of the EV2480-BK instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.





Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920×1080 (Full HD) pixels, maximum contrast of 1000:1, and stable brightness of up to 250 cd/m^2 . That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

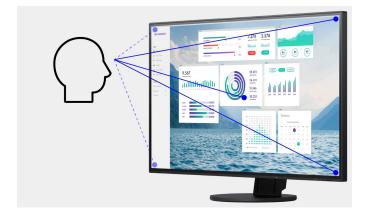

Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day



In the evening




Flicker free: for the sake of the eyes

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland. Learn more about why eyes get tired when working at the computer.


Anti-glare coating: more image, less reflection

The EV2480-BK offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2480-BK effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.



Preset colour modes: optimised display at the touch of a button

Pre-set colour modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.



Operation made easy thanks to the Button Guide

With the Button Guide, you have all functions at a glance. One touch of the control panel is enough, and the function assignment of the buttons is displayed. Your advantage: clarity of operation and a clean, uncluttered design.



Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2480-BK by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.


Learn more about Screen InStyle here.

System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors. Learn more about Screen InStyle Server here.



Monitor Configurator for company-wide monitor setting

Workload reduction for administrators: The software allows you to create a default setup for all relevant monitor settings. This setup can be distributed to the connected monitors via the local network which facilitates the roll-out process.

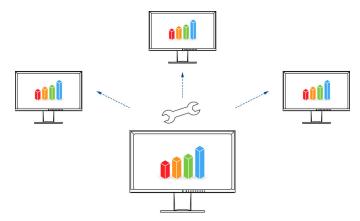

Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.



Environmentally and socially conscious production

EIZO uses the EV2480-BK to showcase how image and product quality go hand in hand with responsible planning, material procurement and production. This intrinsic value enables you to make a safe investment in a modern and reliable monitor.

Socially responsible production

The EV2480-BK is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Learn more about responsible corporate behaviour at EIZO here.





Environmentally and climate friendly

Each EV2480-BK is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR (Corporate Social Responsibility) report.



Sustainable and durable

The EV2480-BK is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2480-BK we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2480-BK consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled material.



Environmentally friendly packaging

For the packaging of the EV2480-BK, EIZO says goodbye to plastic and polystyrene to reduce environmental impact. Instead, the monitor is securely packaged with moulded pulp made from recycled cardboard and newsprint. The enclosed cables are in cellulose cloths instead of plastic bags.



Left: conventional packaging / Right: environmentally friendly materials

Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 9, EPEAT and ENERGY STAR[®]. The EV2480-BK is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.





A natural beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform colour and texture without using paint.



Five-year warranty

EIZO grants a five-year warranty*. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative monitor technology, made from high-end materials.

* in Belgium: including on-site replacement service





General		Electric data	
ltem no.	EV2480-BK	Frequency	USB-C: 31-68 kHz/59-61 Hz; Display Port: 31-68 kHz 59-61 Hz; HDMI: 49-51 Hz/59-61 Hz
Case color	Black	Power consumption (typical) [in watt]	11
Areas of application	Office, Gaming	Maximum Power Consumption [in	142 (at maximum brightness with all signal inputs and US
Product line	FlexScan	watt]	ports in use)
EAN	4995047057758	Power Save Mode [in watt]	0.5
Variants	EV2480-WT (Colour: White)	Power consumption off [in watt]	0
		Energy efficiency class	С
Display		Energy consumption/1000h [in kWh]	12
Screen size [in inches]	23.8	Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
Screen size [in cm]	60.5	Power management	✓
Format	16:9	rower management	•
Viewable image size (width x height)	527 x 296.5		
Ideal and recommended resolution	1920 x 1080 (Full HD)	Dimensions & weights	
Pixel pitch [mm]	0.2745 x 0.2745	Dimensions [mm]	537,8 x 332,4 - 523,6 x 230
	93	Weight [in kilograms]	7.4
Pixel density [in ppi]		Dimensions without stand [mm]	537,8 x 320,4 x 57,4
Resolution supported	1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480	Weight without stand [in kilograms]	4.7
Panel technology	IPS	Housing dimension details	Dimension drawing (PDF)
Max. viewing angle horizontal	178 °	Swivel	344 °
Max. viewing angle vertical	178 °	Incline forward/backward	5°/35°
	178 ⁻ 16.7 million colours (USB-C, 8 Bit), 16.7 million colours	Pivot	✓ 90° (clockwise and anti-clockwise)
Number of colours or greyscale	(DisplayPort, 8 Bit), 16.7 million colours (HDMI, 8 Bit)	Height adjustment range [mm]	191.2
Colour palette/look-up table	1.06 billion colour tones / 10 Bit	Hole spacing	VESA standard 100 x 100 mm
Max. colour space (typical)	sRGB	The spacing	
Max. brightness (typical) [in cd/m ²]	250	Certification & standards	
Max. dark room contrast (typical)	1000:1		
Response time grey-grey alternation	5	Certification	CE, CB, TCO Certified Generation 9, EPA ENERGY STA [®] , TÜV/GS, TÜV/Ergonomics (including ISO 9241-
(typical) [in ms]	10		307)**, TÜV/Blue Low Light Content, TÜV/Flicker Free EPEAT 2018 (US), cTÜVus, TÜV/S, EAC, FCC-B, CAN
Max. refresh rate [in hertz]	60 LED		ICES-3 (B), VCCI-B, CCC, RoHS, China RoHS, WEEE
Backlight			
		Software & accounting	
		Software & accessories	
Features & control	 ✓ 	Accompanying software and other ac-	Screen InStyle
Features & control USB-C docking			Manual via download, Power cord, USB/signal cable
Features & control USB-C docking Preset colour/greyscale modes	✓ sRGB, Paper, Movie, DICOM, 2x additional memory	Accompanying software and other ac- cessories are available for download Additional supply	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve	sRGB, Paper, Movie, DICOM, 2x additional memory spaces	Accompanying software and other ac- cessories are available for download	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes	✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces	Accompanying software and other ac- cessories are available for download Additional supply	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ ✓ 	Accompanying software and other ac- cessories are available for download Additional supply	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ ✓ 	Accompanying software and other ac- cessories are available for download Additional supply	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2C cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ ✓ ✓ ✓ 	Accompanying software and other ac- cessories are available for download Additional supply	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitic
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ ✓ ✓ ✓ ✓ ✓ ✓ 	Accompanying software and other ac- cessories are available for download Additional supply	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2(cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitic Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5),
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ 	Accompanying software and other ac- cessories are available for download Additional supply Accessories	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5),
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI)	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII Image: Comparison of the system of the	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm)
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ ✓<!--</td--><td>Accompanying software and other ac- cessories are available for download Additional supply Accessories</td><td>Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5),</td>	Accompanying software and other ac- cessories are available for download Additional supply Accessories	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5),
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDM1) HDCP Decoder Input signal identification	 ✓ sRGB, Paper, Movie, DICOM, 2x additional memory spaces ✓ ✓<!--</td--><td>Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty</td><td>Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean without scratching the monitor), PP200-K (DisplayPort cable, 2C cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm)</td>	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean without scratching the monitor), PP200-K (DisplayPort cable, 2C cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm)
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean without scratching the monitor), PP200-K (DisplayPort cable, 2C cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm)
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII VIII VIII VIII VIII VI	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Terms	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals), HH200PR-K (HDMI (High Definitic Multimedic Interface) cable), PCSK-A0-3-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language	sRGB, Paper, Movie, DICOM, 2x additional memory spaces v vIII v v v de, en, fr, es, it, se, ja, zh Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour tone, Signal input, Resolution, OSD	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII e, en, fr, es, it, se, ja, zh brighmess, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour temperature/White point,	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitic Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes UICOM tone curve RadiCS application classes Auto EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit	 sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII Vii Vii	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 20 cm), PM200-K (DisplayPort cable to transfer digital vide and audio signals.), HH200PR-K (HDMI (High Definitio Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes UICOM tone curve RadiCS application classes Auto EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII e, en, fr, es, it, se, ja, zh brighmess, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour temperature/White point,	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitic Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide	sRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII e, en, fr, es, it, se, ja, zh brighmess, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour temperature/White point,	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 21 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitie Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView Index EcoView Optimizer Doverdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs	SRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIII VIII de, en, fr, es, it, se, ja, zh Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature/White point, Colour Mode, Colour tone, Signal input, Resolution, OSD language, Scaling, Volume	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 21 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitie Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification	 SRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIIII VIIIII VIIII VIIIII VIIII VIIIII VIIIII VIIIII VIIIII VIIIIII VIIIIII VIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIIII VIIIIIIIII VIIIIIIIII VIIIIIIIIIIIII VIIIIIIIIII VIIIIIIIIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 21 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitie Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification USB upstream ports	 SRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIIII VIIIII VIIII VIIII VIIIII VIIII VIIIII VIIIII VIIIII VIIIIII VIIIIII VIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIIII VIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitic Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView Index EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification USB upstream ports USB downstream ports	 SRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIIII VIIIII VIIIII VIIIII VIIIII VIIIII VIIIII VIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIII <l< td=""><td>Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service</td><td>Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 21 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitie Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*</td></l<>	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 21 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitie Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*
Features & control USB-C docking Preset colour/greyscale modes DICOM tone curve RadiCS application classes Auto EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls Signal range amplifier (HDMI) HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification USB upstream ports	 SRGB, Paper, Movie, DICOM, 2x additional memory spaces VIII VIIII VIIIII VIIII VIIII VIIIII VIIII VIIIII VIIIII VIIIII VIIIIII VIIIIII VIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIII VIIIIIIII VIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	Accompanying software and other ac- cessories are available for download Additional supply Accessories Warranty Warranty Warranty and service	Manual via download, Power cord, USB/signal cable (USB-C - USB-C), Quick guide EIZO ScreenCleaner (for the best possible clean withou scratching the monitor), PP200-K (DisplayPort cable, 2 cm), PM200-K (DisplayPort cable to transfer digital vid and audio signals.), HH200PR-K (HDMI (High Definitic Multimedia Interface) cable), PCSK-03-BK (Thin client mount for the stand EIZO FlexStand 4/FlexStand 5), CP200-BK (USB-C to DisplayPort cable, 200 cm) 5 years warranty*

EIZO Limited

Phone: 01344 317 480 | Fax: 01344 308122 www.eizo.co.uk