


DATASHEET

Power Cable CEE7/7 180° - C13 90°, black

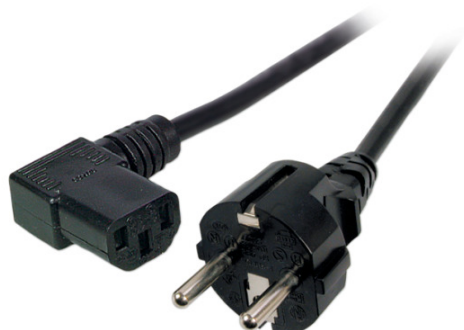

Description

10 A / 250 V VDE tested
 Colour black
 Suitable for Germany, Belgium, France and further (see overview)

General data

Connection 1	SCHUKO plug, straight
Connection 2	Cold device plug angled, female
Number of cores	3
Spiralized cable	False
Protective conductor	True
With cord switch	False
Colour outer sheath	Black

Cable sheath

Material outer sheath	PVC
Temperature resistance	0 - 70 °C

Electrical characteristics

Nominal voltage	250 V
-----------------	-------

Standards, approvals, certifications

Oil resistant (acc. EN 60811-2-1)	False
-----------------------------------	-------

Available variants

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 180° - C13 90°, black

Article no.	Title	Nominal cross section conductor	Outer diameter approx.	Length
EK534.2	Power Cable CEE7/3 180° - C13 90°, black, 2.0 m, 3 x 0.75 mm ²	0.75 mm ²	6.8 mm	2.0 m
EK534.3	Power Cable CEE7/3 180° - C13 90°, black, 3.0 m, 3 x 1.00 mm ²	1.00 mm ²	7.1 mm	3.0 m
EK534.5	Power Cable CEE7/3 180° - C13 90°, black, 5.0 m, 3 x 1.00 mm ²	1.00 mm ²	7.1 mm	5.0 m

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.

