
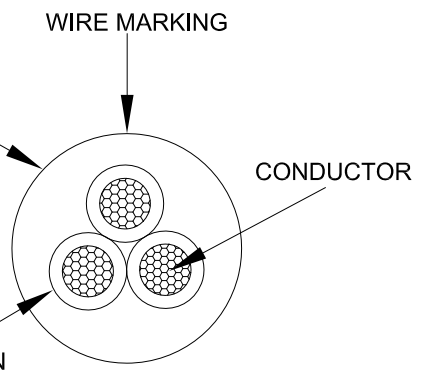



1	2
CUSTOMER NAME	
CUSTOMER Part No.	

7	8	9	10
DATE	REV	DESCRIPTION	BY
2013.09.10	A/0	NEW	Vinci

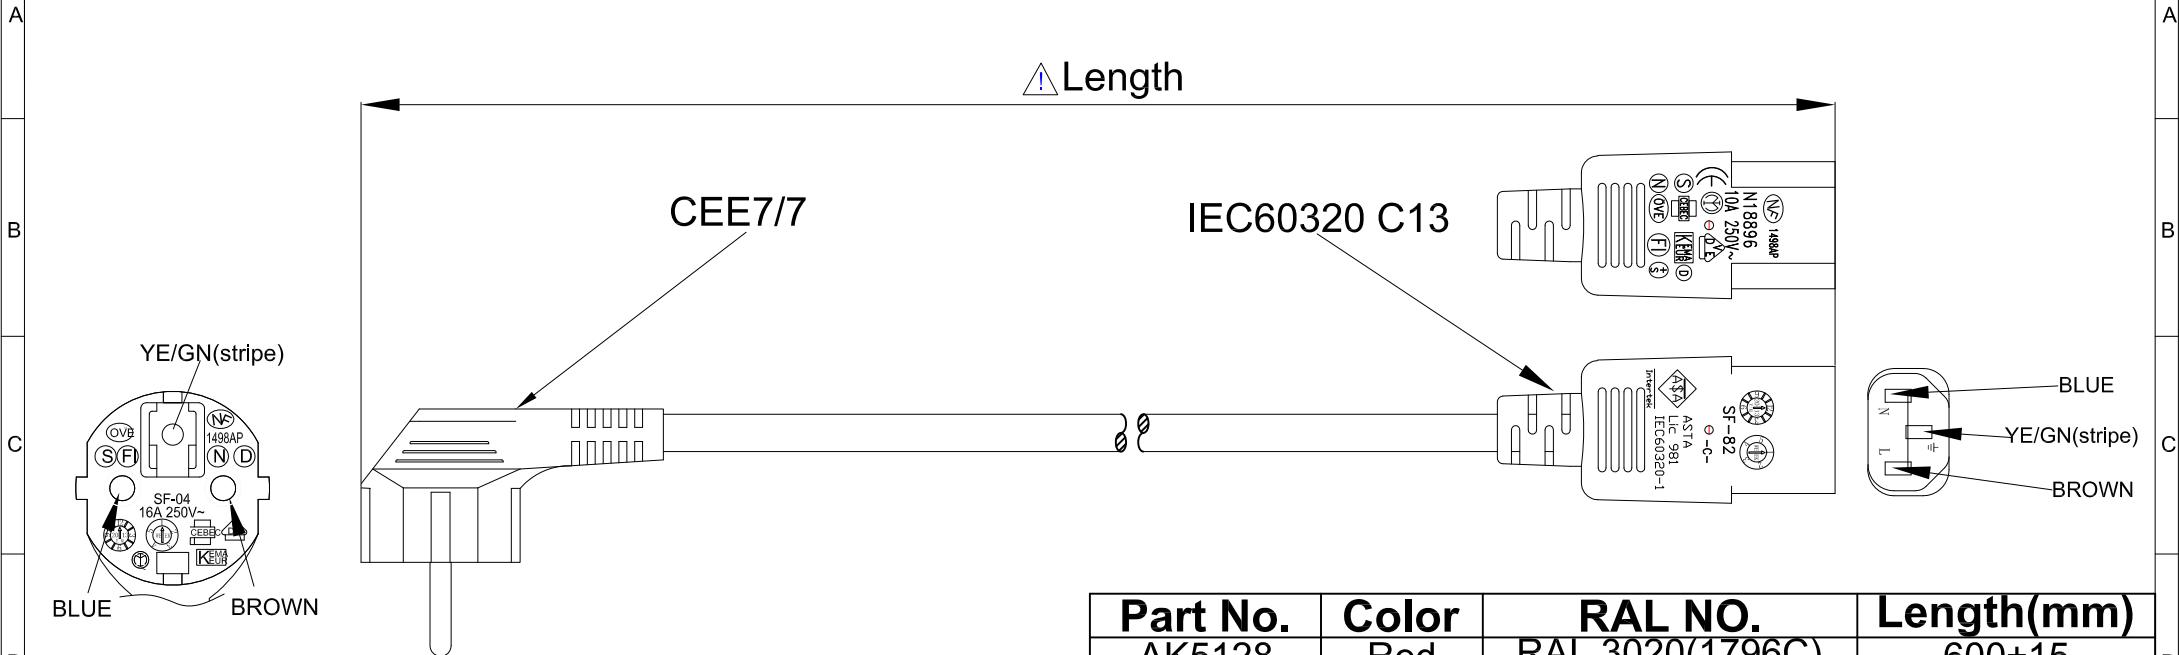

Part No.	Color	RAL NO.	Length(mm)
AK5128	Red	RAL 3020(1796C)	600±15
AK5129	Red	RAL 3020(1797C)	1200±20
AK5130	Red	RAL 3020(1797C)	1800±20
AK5132	Blue	RAL5012(7461C)	600±15
AK5133	Blue	RAL5012(7461C)	1200±20
AK5134	Blue	RAL5012(7461C)	1800±20
AK5136	Green	RAL 6018(375C)	600±15
AK5137	Green	RAL 6018(375C)	1200±20
AK5138	Green	RAL 6018(375C)	1800±20
AK5140	Yellow	RAL 1018(109C)	600±15
AK5141	Yellow	RAL 1018(109C)	1200±20
AK5142	Yellow	RAL 1018(109C)	1800±20

WIRE MARKING: (Hollow) NO.129 + S + S + S KEMA-KEUR 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM² V-75 300/500V ORDINARY DUTY NSW17436

**REMARKS:**

- 1.PLUG(CEE7/7) RATED POWER:250V 16A
- 2.CONNECTOR(IEC60320 C13) RATED POWER:250V 10A
- 3.WIRE: H05VV-F 3G0.75MM² RATED VOLTAGE:300/500V
- 4.DVW TEST:2000VAC,1S
- 5.POLARIZATION AND CONTINUITY TEST

Key Size		3RD						
Length (mm)	Tolerance							
	Critical	Normal	General					
0-15	±0.05	±0.10	±1.0	Part No.				
15-60	±0.10	±0.20		Description	AKXXXX IEC60320 C13+CEE7/7 H05VV-F 3G0.75MM²			
60-150	±0.15	±0.35	±1.5	UNIT	mm	APPROVAL	CHECKER	DRAWER
150-350	±0.20	±0.50		PAGE	1/1			
350-1000	±0.40	±0.65	±2.0	Draw.No.				Vinci