


1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE		REV	
CUSTOMER Part No.		AK5208				2016. 01. 25		A/0	
								DESCRIPTION	
								NEW	
								BY	
								Maxwell	

7	8	9	10
DATE	REV	DESCRIPTION	BY
2016. 01. 25	A/0	NEW	Maxwell

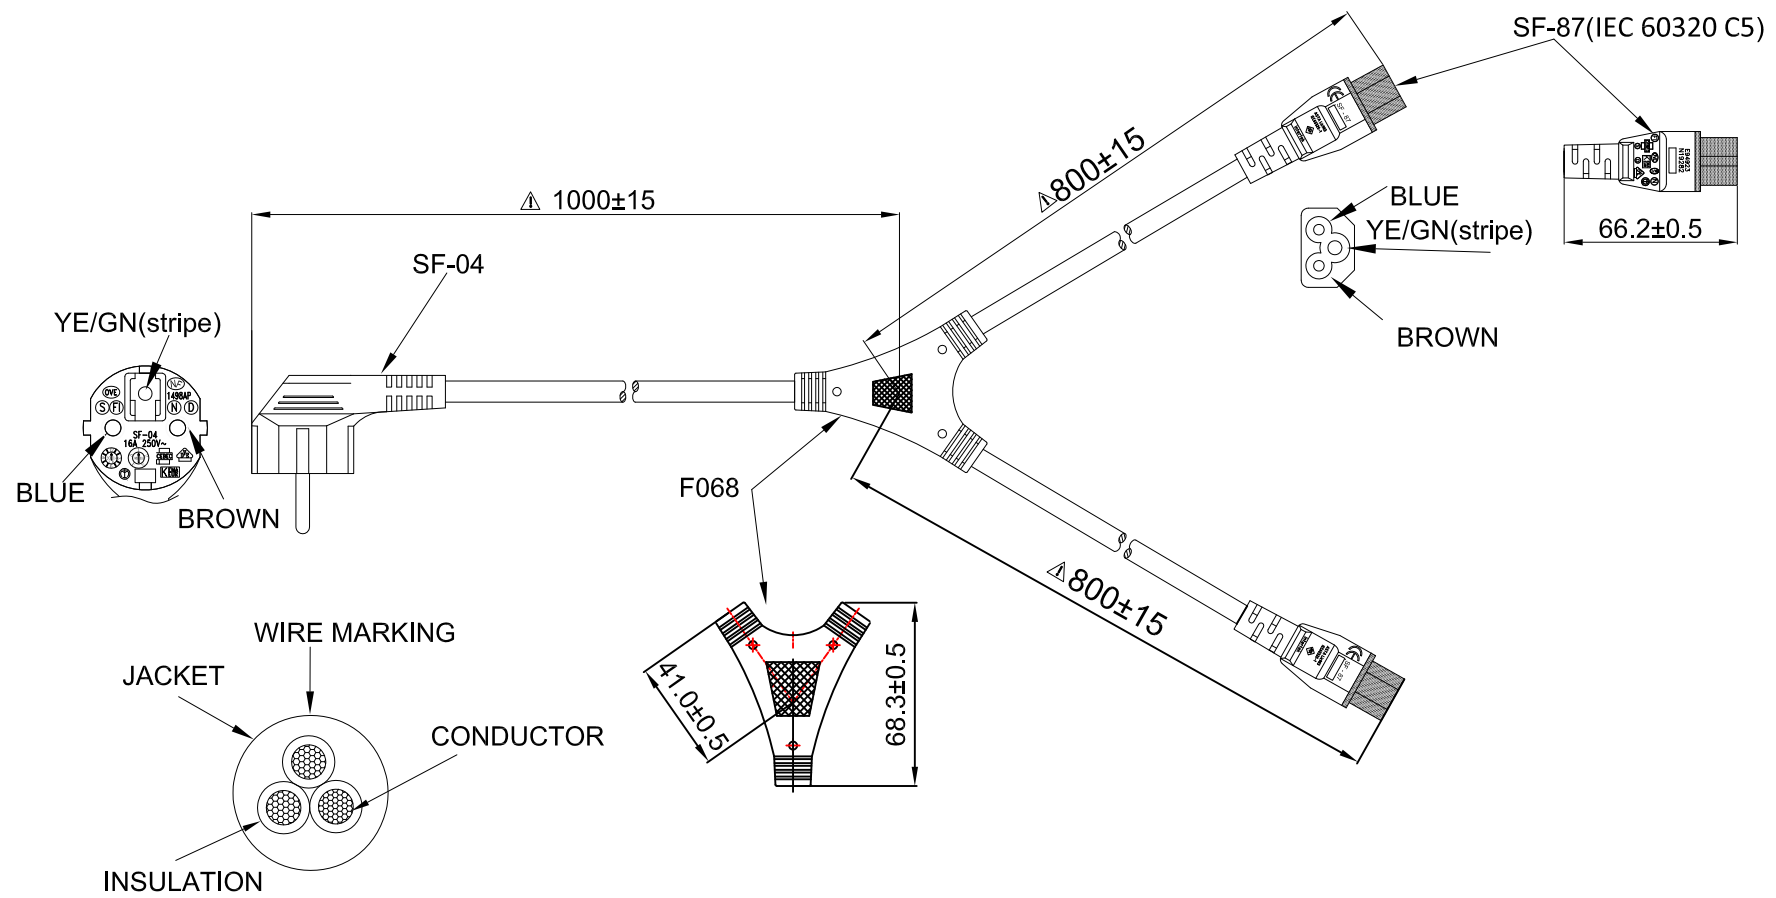

REMARKS:

- 1.PLUG(SF-04) RATED POWER:250V 16A
- 2.CONNECTOR(SF-87) RATED POWER:250V 2.5A
- 3.WIRE:H05VV F 3G0.75mm² RATED VOLTAGE:300V/500V & H05VV F 3G1.0mm² RATED VOLTAGE:300V/500V
- 4.COLOR: BK
- 5.DVW TEST:2000VAC,1S
- 6.POLARIZATION AND CONTINUITY TEST

WIRE MARKING: (Hollow) NO. 133	+ S + S + S KEMA-KEUR CEBC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G1.0MM ² V-75 300/ 500V				
WIRE MARKING: (Hollow) NO. 129	+ S + S + S KEMA-KEUR CEBC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM ² V-75 300/ 500V				
Key Size		3RD			
Length (mm)	Tolerance				
	Critical	Normal	General		
0-15	±0.05	±0.10	±1.0	Part No.	
15-60	±0.10	±0.20		Description	SF-04+F068+SF-87x2 H05VV F3X1.0mm ² +F3X0.75mm ² BK
60-150	±0.15	±0.35	±1.5	UNIT	mm
150-350	±0.20	±0.50		PAGE	1/1
350-1000	±0.40	±0.65	±2.0	Draw.No.	
				APPROVAL	CHECKER
					QinRao
				DRAWER	Maxwell