


REV.	REVISION	DATE

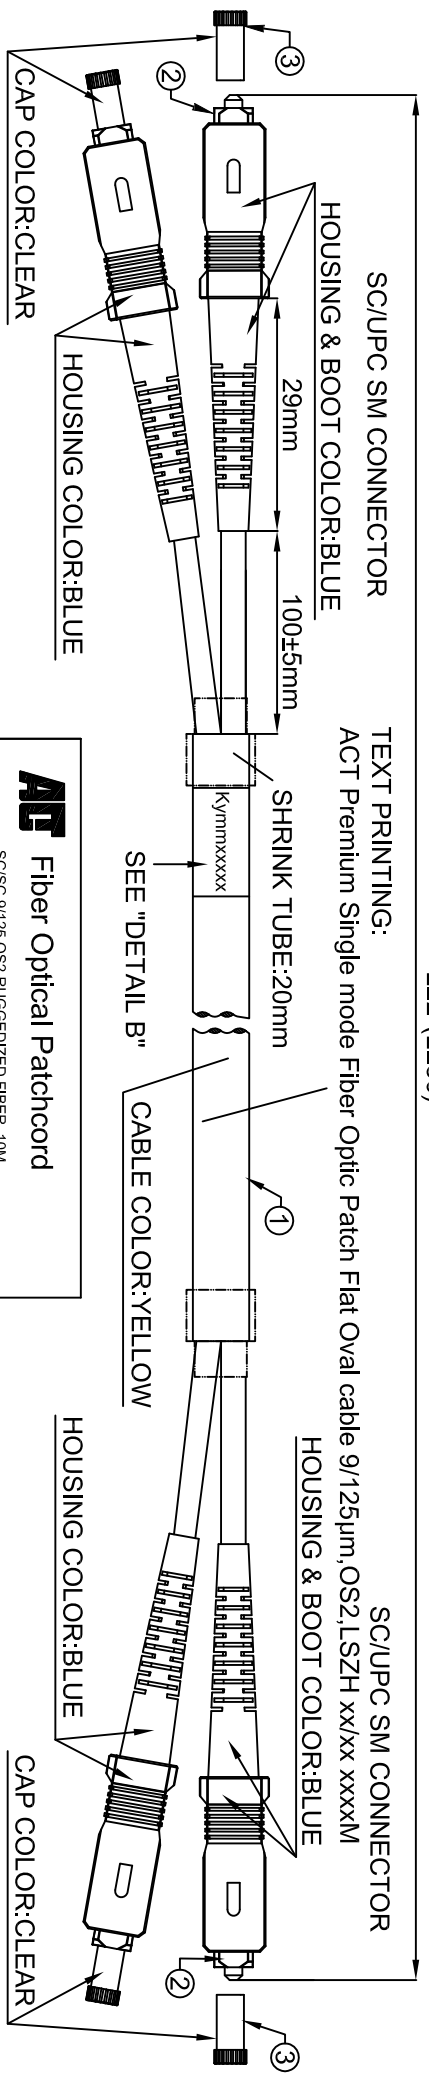

PACKING:

ROUND CABLE METHOD SEE "DETAIL A"	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

ATG Fiber Optical Patchcord

SC/SC 9/125 OS2 RUGGEDIZED FIBER 10M

Model: xxxxx - xxxxxx
Lot number: X X X X X X X X X X X X X X X X




Performance (@23°C) λ=1310/1550±20nm

Serial No	Insertion Loss
A	1310nm
B	1550nm
C	
D	

Serial No: Kymmxxxx

Prepared By: _____ Date: _____

* ACT advices to clean connector ferrule before usage to get optimal performance
* Always leave the dust caps on if the cable isn't installed

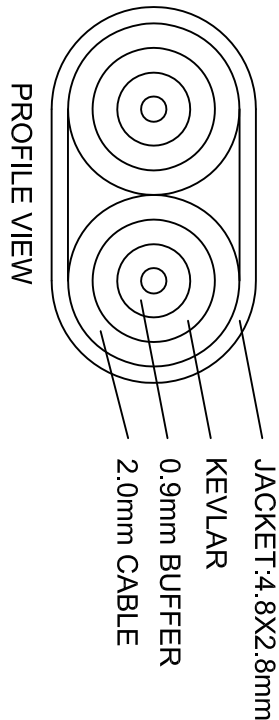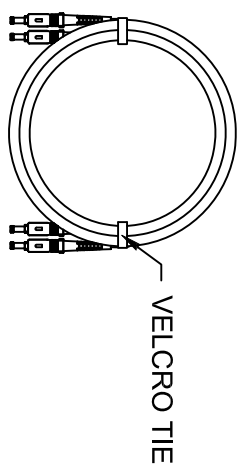

RL5705	05	164.0(50000)	SC/SC 9/125 OS2 RUGGEDIZED FIBER 50M
RL5704	04	131.2(40000)	SC/SC 9/125 OS2 RUGGEDIZED FIBER 40M
RL5703	03	98.4(30000)	SC/SC 9/125 OS2 RUGGEDIZED FIBER 30M
RL5702	02	65.6(20000)	SC/SC 9/125 OS2 RUGGEDIZED FIBER 20M
RL5701	01	32.8(10000)	SC/SC 9/125 OS2 RUGGEDIZED FIBER 10M

PART NO. ** XX L

DESCRIPTION

CUSTOMER APPROVAL: _____ DATE: _____

3	4PCS	SC DUST COVER,CLEAR.
2	4SETS	CONNECTOR:SC/UPC SM,BLUE HOUSING WITH BLUE BOOT.
1	1PC	CABLE:SM,9/125µm,OS2 RUGGEDIZED FIBER,LSZH YELLOW JACKET.
ITEM	QTY	PART NO.

DESCRIPTION

PART LIST

ATG

UNIT: Inches[mm]

TITLE: PATCHCORD SC-SC SINGLE MODE DUPLEX RUGGEDIZED FIBER 9/125 OS2 LSZH, YELLOW.

DRAWN BY: Vernon DATE: 2016.06.13

CHECKED BY: Wale DATE: 2016.06.13

APPROVED BY: David DATE: 2016.06.13

SALE BY: _____ DATE: _____

CUSTOMER PART NO. RL57**

REF. NO. _____ REV. C

TRENDEX PART NO. _____

Product Specification

STANDARD COMPLIANCES

ANSI/TIA-568-C.3

ISO 11801 OS2 /IEC60793-2-10 type B1.3

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2011/65/EU

CONSTRUCTION & CHARACTERISTICS

Polish	Insertion loss typical	0.1 dB
	Insertion Loss max.	0.2 dB
	Return Loss min.	≥50dB
	Polish	UPC
Connector	Connector A side spec.	IEC61754-4 SC Connector
	Connector B side spec.	IEC61754-4 SC Connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OS2
	Fiber type	Single mode 9/125
	Cable type	I-V(ZN)H 4.8x2.8mm LZSH yellow
	Tensile strength	100N (Short time 200N)
	Operation temp.	-20°C to +60°C (5 cycles)
	Vibration	10 to 55 Hz 1.5mm Double Amplitude
Fire performance	Flame retardancy	IEC 60322-1-2 and IEC 60332-3-22 Cat.A
	Smoke density LS	IEC 61034
	Absence of halogen ZH	IEC 60754-1
	Riser cable	LZSH/FRNC
Marking		ACT Premium Single mode Fiber Optic Patch Flat Oval cable 9/125 μ m,OS2,LSZH xx/xx xxxxM

100% tested and approved

- ACT advises to clean every connector ferrule before usage to get optimal performance
- Always leave the dust caps on if the cable isn't installed