

Ultimatte Smart Remote 4



Now you can control up to 8 different Ultimatte 12 units at the same time via ethernet. Smart Remote 4 features a 10.1 inch touchscreen for quickly navigating menus and adjusting settings, along with hard buttons with on line and on air indicators for quickly switching between units. The file clear button automatically adjusts the most important settings to instantly give you incredible composites!

Connections

Software Updates

2 x USB 2.0 and 1 x USB 3.0 for firmware updates.

SVGA Output

SVGA output allows for graphics to be viewed on an external VGA monitor.




Ethernet

2 x 10/100 Mbps Ethernet ports to connect to LAN networks for controlling Ultimatte 12.

RS-422

2 x for controlling Ultimatte 11.

RS-422

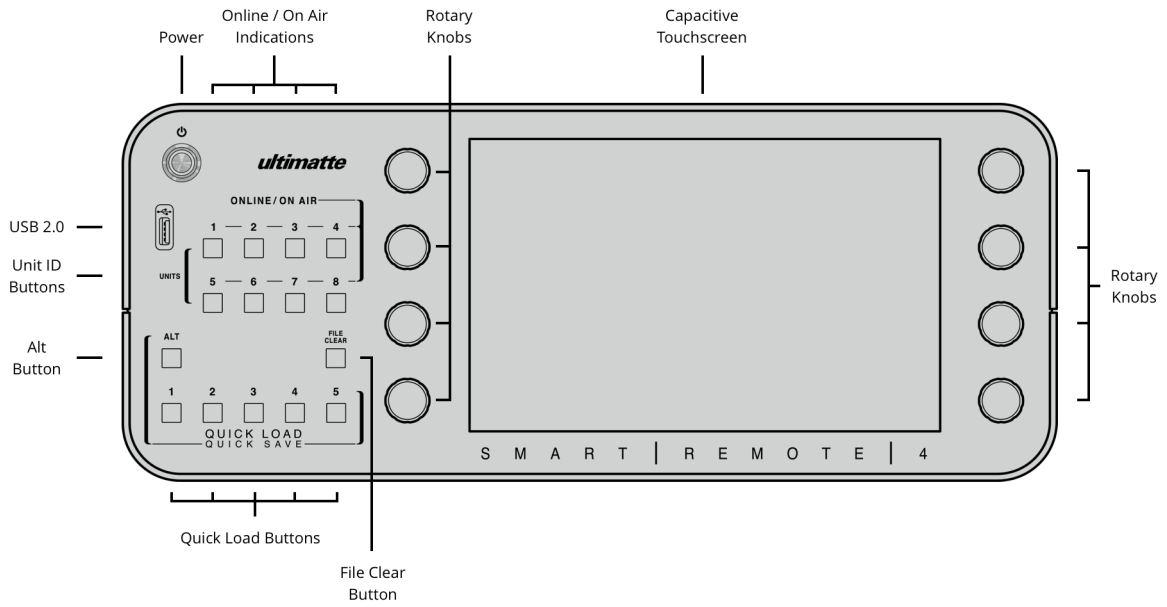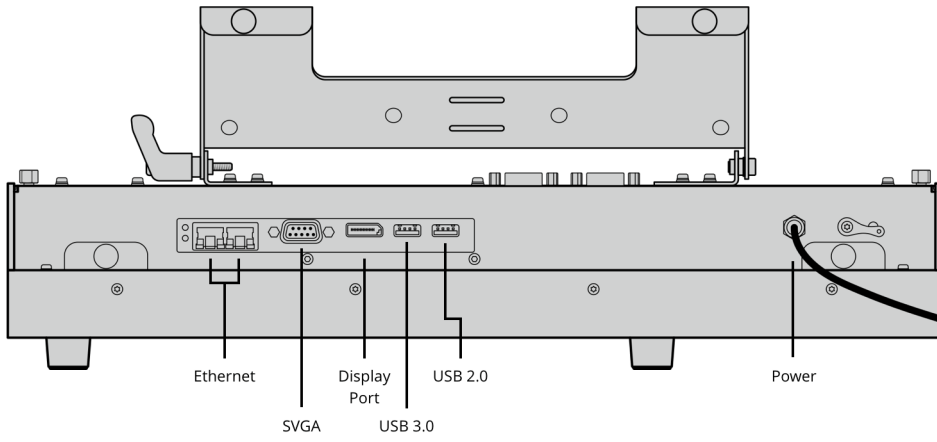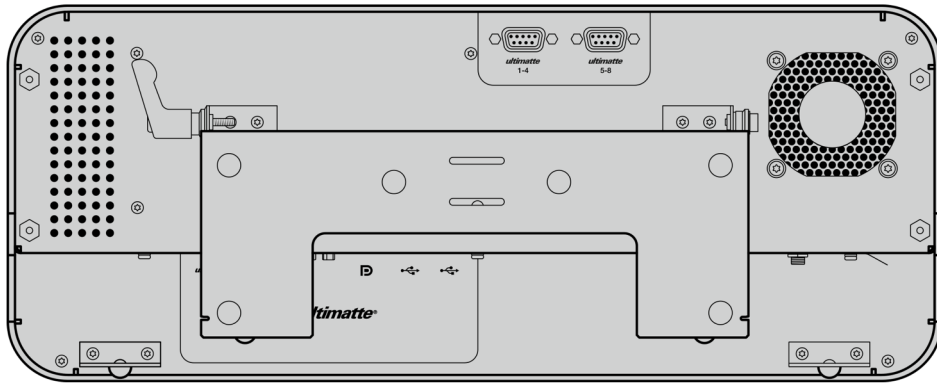

Product Specifics

Rotary Knobs

8 x rotary knobs for adjusting parameters.

Unit ID Buttons

8 x buttons. Illuminated blue for active.

Unit ID LED Indicators

Illuminated green for on line and red for on air.

Alt + Quick Load/Save Buttons

Alt button plus 5 buttons for saving files into volatile RAM.

Quick Load/Save Buttons

5 x buttons for loading files stored in volatile RAM.

File Clear Button

1 x button for One Touch Keying.

Alt + File Clear

Alt button plus file clear button for One Touch Keying using some user defined presets.

Customizable Menus

4 x menus for building your own menu with your most used controls.

LED Control

User adjustable brightness control for LEDs.

Fan Speed Control

User adjustable.

Software

Software Updates

Software updates via USB to load Smart Remote utility.

Control

Touchscreen

10.1 inch 1280 x 800 colour display panel. Integrated capacitive touchscreen with onscreen controls for settings and navigating menus.

Operating Systems



Windows 10, 64-bit.

Power Requirements

Power Supply

100 - 240V AC.

Power Usage

24W

Physical Installation

Adjustable desk mounting option.

Physical Specifications



Environmental Specifications

Operating Temperature

0° to 35°C (32° to 95°F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

0% to 90% non-condensing.

What's Included

Ultimatte Smart Remote 4
SD card contains software and manual
Rack mount ears

Warranty

12 Month Limited Manufacturer's
Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller