


DATASHEET

Duplex Jumper LC-SC 9/125 μ , OS2, Flat Twin

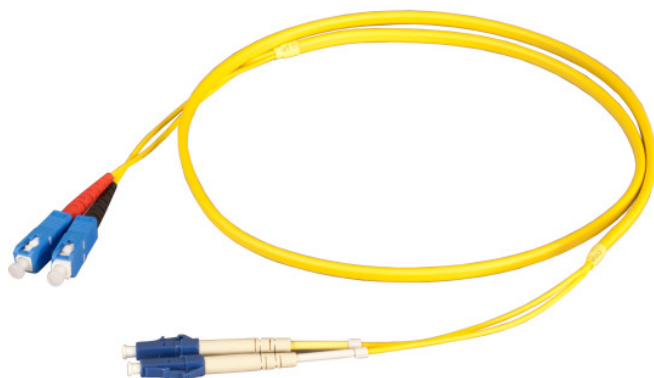

Description

The Flat Twin Duplex Jumper have a higher stability due to the additional added outer jacket and can be installed much easier than standard jumper. Also the jacket material is made of LSZH.

Characteristics

- Additional outer jacket for higher stability and easier installation
- Cable sheath consists of flame retardant LSZH material
- Cable whip length of 150 mm inclusive connector
- Same colour of Cable whip and jacket material
- Compact cable diameter of 3x5 mm
- Simple allocation of the fibers with boots in different colours or A/B markers
- Possibility of coding with clips enclosed to the delivery

General data

Fibre type	Singlemode
Category	OS2
Bend optimized fiber	no
Number of fibres	2
Anti-kink sleeve	put-on
Type of connector connection 1	LC-Duplex
Connector colour 1	blue
Type of connector connection 2	SC-Duplex
Connector colour 2	blue

Cable construction

Cable type	I-V(ZN) HH
Cable Construction	Duplex
Cable \emptyset	3x5 mm

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.



DATASHEET

Duplex Jumper LC-SC 9/125 μ , OS2, Flat Twin

Cable sheath

Colour outer sheath	yellow
Jacket Material	LSZH
Flame retardant	according to EN 50265-2-1

Environmental conditions

Operating Temperature	-40 – 70 °C
Storage Temperature	-40 – 85 °C

Transmission characteristics

Insertion loss 1310nm	<0,2 dB
Quality class singlemode	B/2 acc. IEC 61753-1

Standards, approvals, certifications

Cabling standard	ISO/IEC 11801;EN-50173-1
Cable Conform to Standard	IEC 60793-2

Available variants

Article no.	Title	Length
O0360FT.0,5	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 0.5m	0.5 m
O0360FT.1	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 1m	1.0 m
O0360FT.2	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 2m	2.0 m
O0360FT.3	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 3m	3.0 m
O0360FT.5	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 5m	5.0 m
O0360FT.7,5	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 7,5m	7.5 m
O0360FT.10	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 10m	10.0 m
O0360FT.15	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 15m	15.0 m
O0360FT.20	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 20m	20.0 m
O0360FT.25	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 25m	25.0 m
O0360FT.30	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 30m	30.0 m
O0360FT.35	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 35m	35.0 m
O0360FT.40	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 40m	40.0 m
O0360FT.45	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 45m	54.0 m
O0360FT.50	Duplex Jumper LC-SC 9/125 μ , OS2, LSZH, yellow, Flat Twin 3x5mm, 50m	50.0 m


This datasheet was created automatically on 18-11-2020 . Technical changes reserved.



DATASHEET

Duplex Jumper LC-SC 9/125 μ , OS2, Flat Twin

Technical drawings

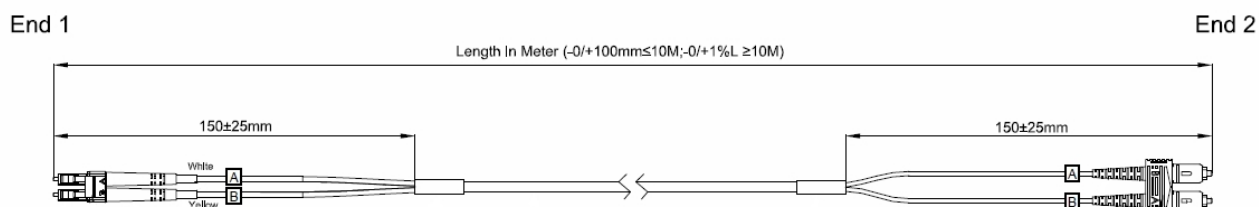

OM-Klassifikation ISO/IEC 11801		OM1	OM2	OM3	OM4	OM5
Min. modale Bandbreite mit vollständiger Anregung aller Kernmoden [MHz*km]	850 nm	200	500	1500	3500	4700
	1300 nm	500	500	500	500	2470
Min. modale Bandbreite (effektive) Laser-Bandbreite [MHz*km]	850 nm	n/s	n/s	2000	4700	n/s
	1300 nm	1.5	1.5	1.5	1.5	1,5
Dämpfung [dB/km]	850 nm	3.5	3.5	3.5	3.5	3,5
	1300 nm					

This datasheet was created automatically on 18-11-2020 . Technical changes reserved.

