


ROHS COMPLIANT

PLUG MARKING:

A/0


DATE	REV	DESCRIPTION	BY	CHECK
	A/0			





SCHUKO POWER PLUG STRAIGHT MALE(SF-03)

IEC 60320 C19 FEMALE(SF-300)

YE/GN(line)

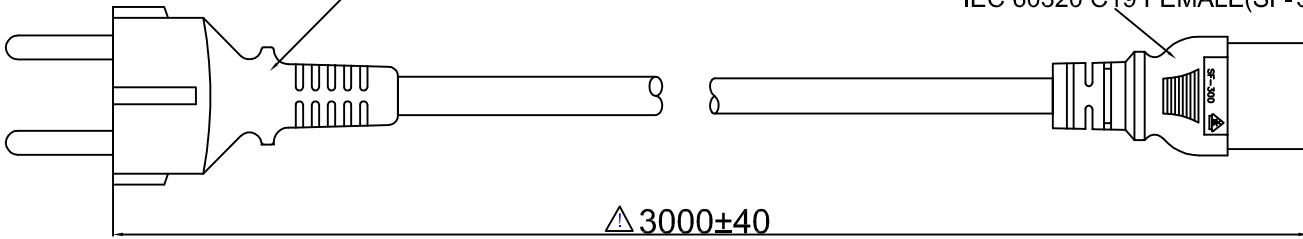

BLUE BROWN

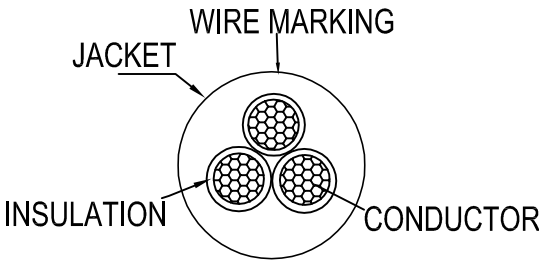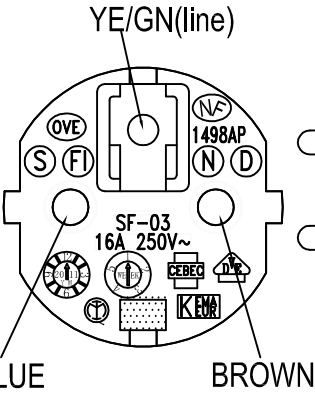

**WIRE MARKING:** + 0 + 0 + 0 KEMA-KEUR (OVE) (S) (N) (FI) Δ CEBC 972 <VDE> NF-USE 1345  
(HOLLOW) IEMMEQU H05VV-F 3G1.5MM<sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436

Conductor		Insulation			Jacket		Overall diameter
mm <sup>2</sup>	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick	
1.5 (29/0.246)	at 20°C, 13.3ohms/km	<b>0.53mm</b>	<b>3.0±0.1mm</b>	130 ↓ mm	<b>0.67mm</b>	<b>0.9mm</b>	<b>8.3±0.1mm</b>

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

**ELECTRIC TESTING:**

- 100% OPEN & SHORT TESTING .
- VOLTAGE RATING:AC ≥2000V/S ≥0.5mA
- PLUG SCHUKO POWER PLUG STRAIGHT MALE (SF-03) RATED POWER:250V 10/16A
- PLUG IEC 60320 C19 FEMALE (SF-300) RATED POWER:250V 16A
- WIRE: H05VV-F 3\*1.5 RATED VOLTAGE:300/500V
- COLOR:BLACK

PAGE	1/1						
Unless specified on the drawing, tolerances are per the follows: .X ± 1 .XX ± 0.5 .XX ± 0.1		DESCRIPTION	H05VV-F3G1.5 SF-03+SF-300				
		CUSTOMER NAME		SAMPLE NO.			
		CUSTOMER PART NO.	AK5022	DRAW	DHY	DATE	2011/10/18
		SCALE		CHECK	wuxiao	DATE	2011/10/18
		UNIT	MM	APPROVAL		DATE	
3RD		PATH NAME					