

SCALE 1/10






Specification :

Material :

1. Panel : Material : SPCC, 1.2mm Thickness, BK(RAL9005)
2. Adaptor: 24 pieces loaded.
 - 2-1. Housing : Polycarbonate, UL94V-0, Blue color.
 - 2-2. Adaptor Sleeve: Zirconia sleeve.
 - 2-3. Holder : Polycarbonate, UL94V-0, Blue color.
 - 2-4. Dust Cover : PP, White Color.
3. Splice cassette: 2 pieces.
4. 20mm Cable gland: 2 pieces.
5. fiber management spool: 2 sets.

Performance :

- a. Height : 1U(43.65mm) Width : 19"(482.6mm) Depth : 10"(255.0mm)
- b. Shelf Mounting Adjustment Range : 0~245.0mm
- c. Net Weight : 4.5kg
- d. LC to LC Duplex Type.
- e. Durability : 500 cycles.
- f. Tensile Strength : 10 kgf.
- g. Insertion Loss : <0.2 dB(Singlemode).
- h. Operating Temperature : -20°C to +70°C.
- i. Storage Temperature: -40°C to +80°C.

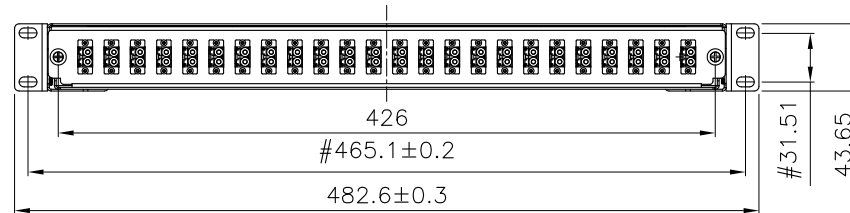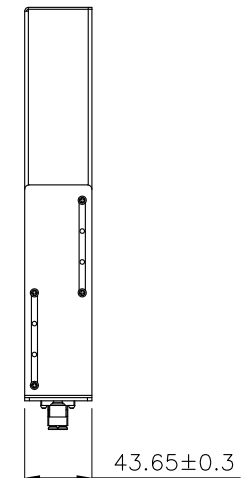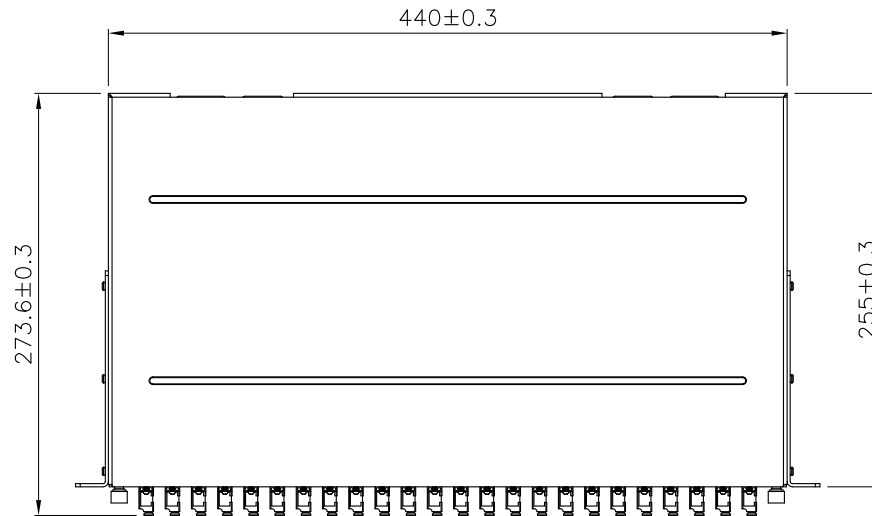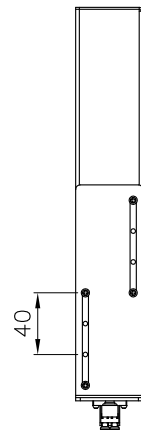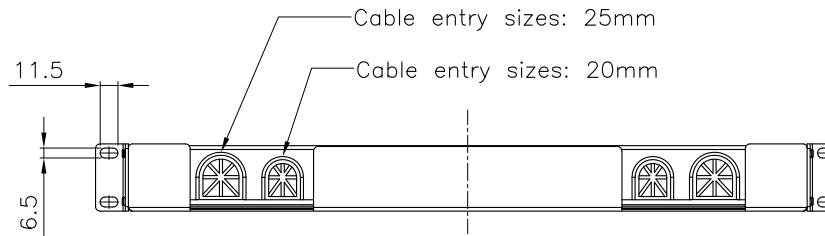

"#" : Matching DIM. "*" : Important DIM. Others General DIM.	DRAWING	12.SEP.2018	LJM	AG
	CHECK	12.SEP.2018	DAY	
	APPROVAL	12.SEP.2018	FRANK	
GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DATE	NAME	ITEM NO.: FA2036	
	SCALE	1/5 (A4)	UNIT	mm
	DRAWING NO. Fiber panel 24 x duplex LC singlemode OS2(S03)		DES.: Fiber panel 24 x duplex LC singlemode OS2	
DRAWING CLASSIFICATION		S	SHEET	1 OF 1

