




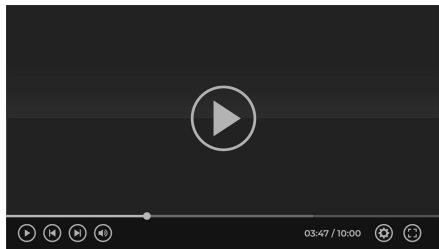
MAX400S - HDS

 456 x 290 x H318 mm
17.95 x 11.41 x H12.51 inch.

 400 x 230 x H260 mm
15.74 x 9.05 x H10.23 inch.

 47,5 + 112,5 mm
1.87 + 8.36 inch.

 VERSION S: 2,7 kg / 5.95 lb
VERSION HDS: 3,10 kg / 6.83 lb



HIGH DENSITY
CUBED FOAM
VIDEO



- **WATERTIGHT SEAL AROUND LID** / GUARNIZIONE ERMETICA
- **AUTOMATIC PRESSURE RELEASE VALVE** / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE
- **EASY TO OPEN DOUBLE THROW LATCHES** / CHIUSURE DI SICUREZZA A DOPPIO STEP
- **LOAD TESTED SOFT GRIP HANDLE** / MANICO MORBIDO AD ALTA ERGONOMICITÀ
- **STACKABLE INTERLOCKING SYSTEM** / SISTEMA DI IMPILABILITÀ
- **THICK BODY MATERIAL** / PARETI SPESSIE ANTIURTO
- **EXTRA FIXING POINTS** / PUNTI DI FISSAGGIO PER VARIE APPLICAZIONI
- **FULLY LENGTH HINGES** / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA
- **NYLON PINS, CORROSION FREE** / PERNI IN NYLON ANTI CORROSIONE
- **SCREEN PRINTING AND RESIN LABEL SPACE** / SERIGRAFIA ED ETICHETTA RESINATA
- **MATERIAL: POLYPROPYLENE COPOLYMER** / MATERIALE: POLIPROPILENE COPOLIMERO
- **LATCHES: NYLON** / SERRATURE IN NYLON
- **O-RING: POLYMER** / GUARNIZIONE POLIMERO


- **VOLUME CAPACITY: 19.64 LT** / CAPACITÀ: 22 LT
- **PCS PER CARTON: 2** / PEZZI PER CARTONE: 2
- **WEIGHT OF THE FULL CARTON: 5.80 KG - 12.70 LBS.** / PESO DEL CARTONE: 5.80 KG
- **MOULDING: INJECTION MOLDED** / STAMPAGGIO: AD INIEZIONE
- **RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F)** / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)
- **ACCESSORIES: CUBED & CONVOLUTED FOAMS - PADDED DIVIDERS - LID ORGANIZER - SHOULDER STRAP** / SPUGNE CUBETTATE & SPUGNE BUGNATE - TRACCOLLA IMBOTTITA

IP67 RATING


ATA 300

MIL SPECS


DEF STAN 81-41
STANAG 4280



+



+



=



Base foam

1 x 20 mm / 1 x 0.79 inch

Cubed foam

2 x 40 mm / 2 x 1.57 inch


Convuluted foam

1 x 45 mm / 1 x 1.77 inch


MAX400S



+



+



=



Base foam

1 x 20 mm / 1 x 0.79 inch

High Density Cubed foam

2 x 40 mm / 2 x 1.57 inch

Convuluted foam

1 x 45 mm / 1 x 1.77 inch

MAX400HDS