

ATEM 4 M/E Advanced Panel



DSK Transition Selectors

This massive model is big enough to perfectly match the features on the ATEM Constellation switcher! It features 4 M/E rows with 40 input buttons per row and 4 independent system control LCDs for each row. This massive panel includes 24 LCD's for custom labeling of every button on every row!


Connections

Ethernet

 $4 \times 10/100/1000$ BaseT with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

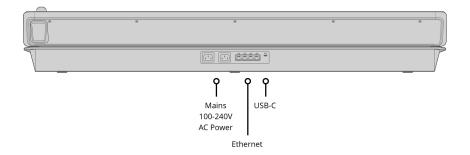

Product Specifics

Number of Mix Effects Rows

4	10 rows 24 character LCD	Auto, Cut, Tie/Preview x 4
Direct Cross Points 40	Next Transition Selectors 4 x BKG, Key 1 - Key 4.	Preview Transition
Shifted Cross Points 80	On-Air indicator 20	Transition Rate Displays Via main menu
Crosspoint Button Type Tri-Color LED	Power Status Indicators None	LCD Menu Displays

Crosspoint Label

Menu Control

20 buttons x 4

Dedicated Macro Buttons

4 x 40

Transport Control Buttons

24

Destination Bus 4

Source Select Bus

Fader Bar

4

3 Axis Joystick

Numeric Keypad

1

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac 10.14 Mojave, Mac 10.15 Catalina or later.



Windows 10, 64-bit.

Power Requirements

Input Voltage

2 x Internal 100 - 240V AC.

Redundant Power

Power Usage

250W

Physical Specifications



Environmental Specifications		
Operating Temperature 0° to 40° C (32° to 104° F)	Storage Temperature -20° to 60° C (-4° to 140° F)	Relative Humidity Up to 95%
What's Included		
ATEM 4 M/E Advanced Panel		
Warranty		
12 Month Limited Manufacturer's Warra	inty.	
	is website uses remarketing services to advertise o	arks are property of their respective owners. MSRP includes on third party websites to previous visitors to our site. You can
Blackmagic Design Authorized	Reseller	